

Assembly Instructions

1


Loosen the screws on top of part 2 of the post. Slide shorter arm of part 1 into the top sleeve of part 2, applying force to make sure that part 1 is all the way in the sleeve. A lubricant can be used for ease of installation between the two parts (ex. WD40, olive oil, etc.). Fasten the parts with the self-tapping screws.

2

Undo the two bolts on the bottom of part 2 of the post. Slide part 3 (metal stand) into the bottom of part 2, making sure that the long arm of the stand is facing the sign (for proper stability). Align the holes of the two parts, feed the bolts through the holes and tighten the nuts.

3

Install the post on suitable ground by applying pressure onto part 3 (metal stand) with your foot, making sure that the rods are going all the way into the ground.

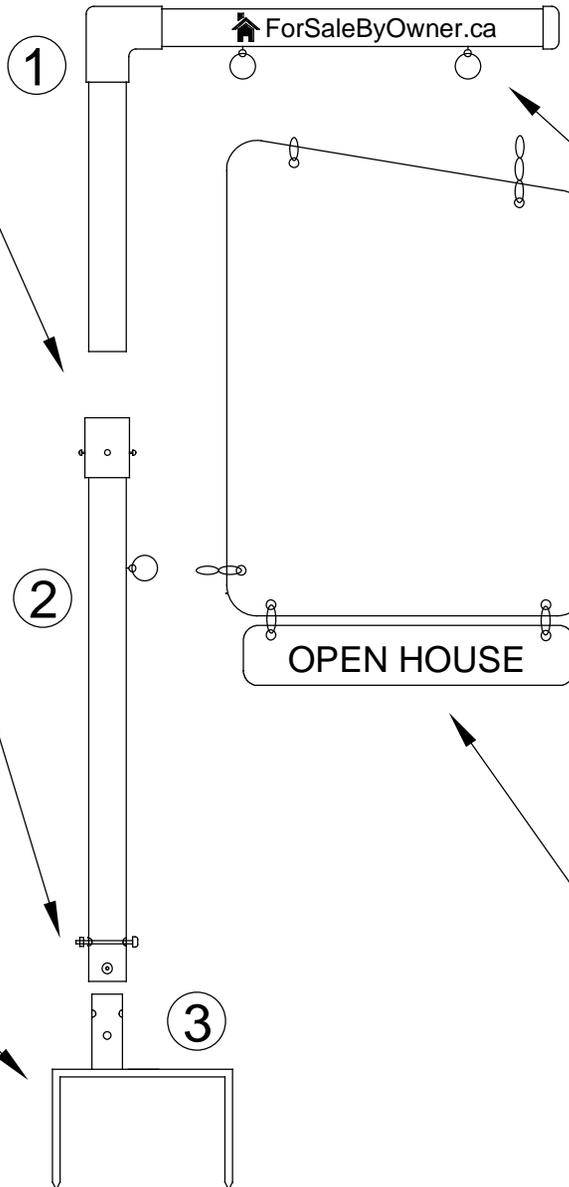

4

To attach the sign to the post, open up the binder rings (which come attached to the eyelets on part 1 & 2 of the post) and join with the outermost loops of the chains (which come attached to the sign). Close the binder rings.

ATTENTION

If strong winds are common in your area, we recommend that you skip the binder rings and attach the sign directly to the post. Using pliers, open the end loops of the 3 chains attached to the sign, feed the loops through the eyelets, and close the loops.

5

OPTIONAL ADD-ON SIGN (IF PURCHASED)

To install the add-on sign, open up the binder rings (which come attached to the add-on sign) and feed them through the holes on the bottom of the main sign (they come installed only on signs with purchased add-on signs). Close the binder rings.